



# HIOKI

## INFRARED THERMO HiTESTER 3419-20

Environmental measuring instruments



### Pistol design with easy-to-see display

### Measuring couldn't be easier !



Measure safely even in dangerous places



LCD



Backlight for operating even in the dark

Laser Marker

Trigger

Simple, one-hand operation

Strap

- Easy Battery Replacement
- F/C Selectable
- Audible Alarm Feature



ISO 9001  
JMM-0216



ISO 14001  
JQA-E-90091



[www.hioki.com](http://www.hioki.com)

HIOKI company overview, new products, environmental considerations and other information are available on our website.

# One-touch measurement – just pull the trigger



Begin measuring




## Useful Functions

- Max/Min Function
- Upper and Lower Alarm Setting
- Stores up to 50 measurements
- Auto Power Off
- Backlight

## Specifications

Detection element	Thermopile
Measurement temperature range	-35 to 500 °C (-31 to 932 °F)
Display resolution	0.1 °C (0.2 °F)
Response time	2 times/ second
Measurement wavelength	6 to 14 μm
Thermal emissivity compensation	0.17 to 1.00 by steps of 0.01
Diameter of field of measurement	125 mm at 1000 mm (D : S = 8 : 1)
Sighting	Laser marker MAX 1 mW (class 2), Red
Power supply	6F22 manganese battery × 1 or 6LR61 alkaline battery × 1
Continuous operating time	Approx. 55 hours (manganese battery), Approx. 80 hours (alkaline battery), When laser marker and backlight are OFF
Accuracy	-35.0 to -0.1 °C : ± 10 % rdg. ± 2 °C 0.0 to 100.0 °C : ± 2 °C 100.1 to 500.0 °C : ± 2 % rdg.
Temperature coefficient	Measurement accuracy × 0.1/ °C
Dimensions	Approx. 46 W × 172 H × 118 D mm (1.81" W × 6.77" H × 4.65" D)(excluding projections)
Mass	Approx. 220 g (7.8 oz.) (including manganese battery × 1)
Location for use	Indoors, altitude up to 2000 m (6562-ft.)
Operating temperature and humidity	0 to 50°C (32°F to 122°F), 80%RH or less (non-condensating)
Storage temperature and humidity	-10 to 50°C (14°F to 122°F), 80%RH or less (non-condensating) 50 to 60°C (122°F to 140°F), 70%RH or less (non-condensating)
Applicable standards	EMC : EN61326 Laser : IEC60825-1 CLASS 2 LASER
Additional Function	MAX/ MIN display, Alarm function, Backlight function, Memory (50 data)
Accessories	Instruction manual, 6F22 manganese battery × 1 (supplied with this product for monitor), Carrying case × 1

## Measurement focus

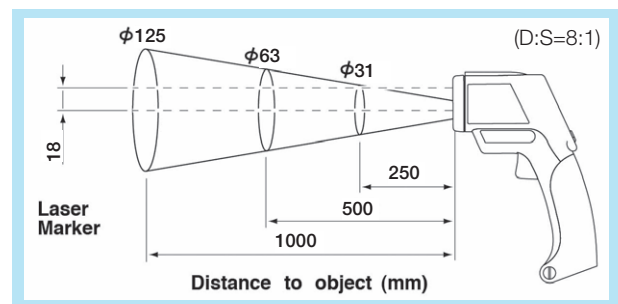

## Option

### Black body tape

(50 mm × 10 m, 1 roll) Withstands 180°C ε=0.95

\*Optional use of black body tape allows increased emissivity in order to obtain accurate temperature measurements on low-emissivity materials such as metals.



Accessories  
Carrying case

### Laser Product Caution Notice

A caution label is attached to the HiTester. Be sure to observe the operating precautions on the label.



**HIOKI**  
HIOKI E. E. CORPORATION

HEAD OFFICE :  
81 Koizumi, Ueda, Nagano, 386-1192, Japan  
TEL +81-268-28-0562 / FAX +81-268-28-0568  
E-mail: os-com@hioki.co.jp

HIOKI USA CORPORATION :  
6 Corporate Drive, Cranbury, NJ 08512 USA  
TEL +1-609-409-9109 / FAX +1-609-409-9108  
E-mail: hioki@hiokiusa.com

HIOKI (Shanghai) Sales & Trading Co., Ltd. :  
1608-1610 Shanghai Times Square Office, 93 Huai Hai Zhong  
Road, Shanghai, P.R.China POSTCODE: 200021  
TEL +86-21-6391-0090/0092 FAX +86-21-6391-0360  
E-mail: info-sh@hioki.com.cn

Beijing Office :  
A-2602 Freetown, 58 Dong San Huan Nan Road  
Beijing, P.R.China POSTCODE: 100022  
TEL +86-10-5867-4080/4081 FAX +86-10-5867-4090  
E-mail: info-bj@hioki.com.cn

Guangzhou Office :  
Room A-3206, Victory Plaza Services Center, No.103,  
Tiyuxi Road, Guangzhou, P.R.China POSTCODE: 510620  
TEL +86-20-38392673/2676 FAX +86-20-38392679  
E-mail: info-gz@hioki.com.cn

DISTRIBUTED BY