

Remarkable ease of use

Double your speed for checking leakage current



Actual size



Identify intermittent GFCI and RCD trips to prevent unplanned equipment downtime by testing for earth leakage current.

0.60 mA to 600.0 A AC

CAT III 300 V

• **Slim jaws let you work with ease**

Designed easily clamp within crowded cables while maintaining measurement performance, save work time and improve safety

• **Measure everything from leakage to load**

With guaranteed accuracy from 0.60 mA to 600.0 A, the CM4001 provides a one-stop solution for a variety of applications


• **Find issues faster with a comparator function**

Quickly Identify leakage current locations with red backlight and audio alerts based on comparison with set threshold value

Work twice as quickly

Work time comparison: Checking 20 circuit breakers in a distribution panel for leakage current

Task: (Clamp to measurement location → Check value) × 20 locations

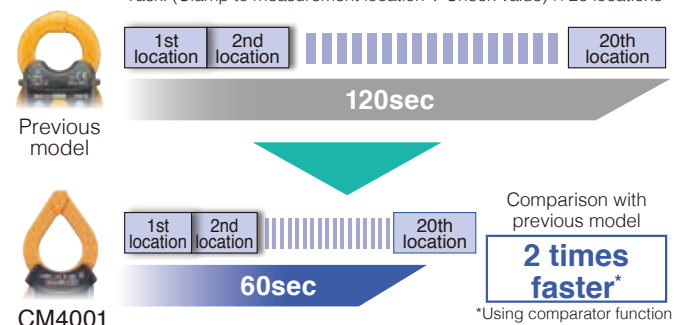

Key benefits and applications

Perform everyday maintenance work more safely and easily

- Slim jaws simplify measurements within crowded cables, improve efficiency and reduce work time
- Filter function eliminates unwanted noise to let you measure close to the 50 Hz/60 Hz fundamental frequency
- White backlight, measured value hold, and auto power off features add convenience
- **[AUTO HOLD]** function automatically holds the measured value for use in difficult places to see the display

Support for troubleshooting and diagnostics

- The CM4001 retains maximum, minimum, and average **[MAX/MIN/AVG]** RMS current values to make it easier to analyze potential problems
- Waveform peak value measurement **[PEAK]** capture intermittent or transient events
- Inrush current measurement **[INRUSH]** captures the starting current up to 150 ms from the trigger to help locate equipment startup problems and contributes to a preventive maintenance log for future reference



Clamp thick wires and double wires with narrow spacing smoothly

Specifications

(Accuracy guaranteed for 1 year, Post-adjustment accuracy guaranteed for 1 year, Product warranty period is 3 years.)

AC measurement method	True RMS	Standards	Safety: EN 61010, A type current sensor Measurement category: CAT III 300V EMC: EN61326	
Core jaw diameter	φ24mm	Peak function	Detection from 2ms or more (with filter function OFF)	
AC current	Accuracy specification range	Filter function	-3dB at 180Hz ± 30Hz	
	Display range	Display refresh rate	5 times / sec	
	Range / Accuracy	60.00mA / ±1.5%rdg ±5dgt (45Hz-66Hz)	Operating temperature	-10°C to 65°C
		600.0mA / ±1.5%rdg ±5dgt (45Hz-66Hz)	Operating humidity (no condensation)	-10°C to 40°C, 80% RH or less 40°C to 45°C, 60% RH or less 45°C to 65°C, 50% RH or less
		6.000A / ±1.5%rdg ±5dgt (45Hz-66Hz)		Storage temperature
60.00A / ±2.5%rdg ±5dgt (45Hz-66Hz)		Power supply		LR03 alkaline battery x1
600.0A / ±2.5%rdg ±5dgt (45Hz-66Hz)	Continuous use	32 hours		
Frequency characteristics	40.0 Hz to 999.9Hz	Dimensions and weight	37mm(1.46in)W x 160mm(6.30in)H x 27mm(1.06in)D, 115g (4.1 oz)	
Effects of external magnetic fields	With an external magnetic field of 400A AC/m Max. 7.0mA (6.000A range and lower) Max. 4.0A (60.00A range and higher)	Usage environment	Indoor use, pollution degree 2, altitude up to 2000m	
Crest factor	3			
Zero display range	5 count or less			

Model/Accessories

Model : AC LEAKAGE CLAMP METER CM4001

Model No. (Order Code)

CM4001

CM4001-90 CM4001 + Wireless Adapter Z3210 (Recommended)

CM4001

Strap

Carrying case

Instruction manual

LR03 alkaline battery x1



Add wireless communication capability for even greater convenience

Connect the Z3210 and transfer measurements to the tablet

New release



Wireless Adapter
Z3210

Connect to the CM4001 to add Bluetooth® capability.



Check and record measurement results with GENNECT Cross, a free app from HIOKI.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license.

HIOKI

HIOKI E. E. CORPORATION

HEADQUARTERS

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



Scan for all regional contact information

DISTRIBUTED BY



ASM Automation Sensorik Messtechnik GmbH

Tel. +49 8123 986-0
info@asm-sensor.de
www.asm-sensor.de

Am Bleichbach 18 - 24
85452 Moosinning